

AC/DC Kilovoltmeters and Dividers



Testing Applications

- Units can be used for calibration and general high voltage measurements
- Traceable calibration to NIST, USA
- Voltage divider can also be used with other measuring devices such as an oscilloscope or multimeter.
- Resistive-Capacitive voltage divider
- Complies with IEEE Std 4 and IEC 60060-2

- **Precise and reliable**
- **Battery or line powered**
- **100 kV – 300 kV** models **standard, higher voltages** are available **upon request**
- **IEC 17025 calibration** upon request



	MODEL	KVM100A	KVM200A	KVM300A	
SPECIFICATIONS	INPUT POWER	100-240 VAC, 0.4 A, 47-63 Hz, Single Phase			
	BATTERY POWER	9.6 V, Ni-MH, 3200 mA hr			
	INPUT CHARGING JACK	+15 VDC, 1.5 A			
	RESOLUTION	RANGE	RANGE	RANGE	
	1 VOLT	0-20 kV	0-20 kV	n/a	
	10 VOLT	0-100 kV	0-200 kV	0-30 kV	
	100 VOLT	n/a	n/a	0-300 kV	
	HIGH VOLTAGE INPUT				
	LOW RANGE	0-20 kV AC/DC	0-20 kV AC/DC	0-30 kV AC/DC	
	HIGH RANGE	0-100 kV AC/DC	0-200 kV AC/DC	0-300 kV AC/DC	
	PEAK AC	0-141 kV	0-200 kV	0-424 kV	
	DIVIDER IMPEDANCE				
	RESISTANCE	380 M Ohms	760 M Ohms	1200 M Ohms	
	CAPACITANCE	200 pF	100 pF	200 pF	
RATIO	10,000:1	10,000:1	10,000:1		
DIMENSIONS & WEIGHT				Controls	HV Divider
	Length	9 1/2" (241 mm)	9 1/2" (241 mm)	14" (356 mm)	26" (660 mm)
	Width	9 1/2" (241 mm)	9 1/2" (241 mm)	12" (305 mm)	26" (660 mm)
	Height	30 1/2" (775 mm)	43 1/2" (1105 mm)	7" (178 mm)	63" (1600 mm)
	Weight	30 lbs (14 kgs)	43 lbs (20 kgs)	11 lbs (5 kgs)	100 lbs (45 kgs)
SHIPPING SIZE	Length	14" (356 mm)	14" (356 mm)	29" (737 mm)	
	Width	14" (356 mm)	14" (356 mm)	36" (914 mm)	
	Height	36" (914 mm)	50" (1270 mm)	76" (1930 mm)	
	Weight	36 lbs (16 kgs)	50 lbs (23 kgs)	285 lbs (130 kgs)	
CABLES INCLUDED	Input Power 10' (3 m)	Metering Interconnect 25' (8 m)	Ground (2) 10' (3 m)		

Voltage Measurement Functions / Frequency Range

AC AVERAGE	Average Value of the Rectified AC Voltage (Equivalent to RMS Value divided by 1.11 for a Pure Sinusoid)
AC RMS	True RMS Value of the AC Voltage
AC PEAK	Average of the Positive and Negative Peak Voltage Values
AC PEAK $1/\sqrt{2}$	Average of the Positive and Negative Peak Voltage Values, divided by $\sqrt{2}$ (Equivalent to RMS Value for a Pure Sinusoid)
DC AVERAGE	Average Value of the DC Voltage
DC PEAK	Peak Value of the DC Voltage
DC RIPPLE	Peak Value of Ripple Voltage

Uncertainty (Based on k=2, Confidence Interval of 95%)


Metering Head	0.5% of reading from 10-100% or range
Divider Ratio	0.4%

NOTE: Above specified uncertainties are valid for AC and Ripple voltage measurement functions in the range of 20-1000Hz.

Precision Modular Divider for on-site or lab use

Designed to be easily disassembled and transported and still offer excellent stability and low ratio error. The largest single piece is less than 900 mm (37") long and less than 55 kgs (120 lbs). This divider can be used as the primary calibration standard to calibrate precision ultra-high voltage AC /DC measurement systems on-site. Transportation boxes are available as an option. Other ratios are available upon request.

MODEL	DVD233-1M	DVD467-2M	DVD700-3M	DVD933-4M
AC Rating	166 kV	334 kV	500 kV	668 kV
DC Rating	233 kV	467 kV	700 kV	933 kV
Capacitance	1 nF	0.5 nF	0.33 nF	0.25 nF
Resistance	667 M Ohms	1333 M Ohms	2000 M Ohms	2666 M Ohms
Divider Ratio	per customer requirement, consult factory			
Height with Base	72" (1829 mm)	107" (2718 mm)	141" (3581 mm)	177" (4496 mm)
Base Dimensions	70" x 70" x 13" (1780 mm x 1780 mm x 330 mm)	70" x 70" x 13" (1780 mm x 1780 mm x 330 mm)	70" x 70" x 13" (1780 mm x 1780 mm x 330 mm)	100" x 100" x 13" (2540 mm x 2540 mm x 330 mm)
AC Frequency Range	20-300 Hz	20-300 Hz	20-300 Hz	20-300 Hz
Response Time	consult factory			
Weight	215 lbs (98 kgs)	295 lbs (134 kgs)	375 lbs (170 kgs)	455 lbs (206 kgs)
Ratio Error DC	consult factory			
Ratio Error AC (50/60 Hz)	consult factory			

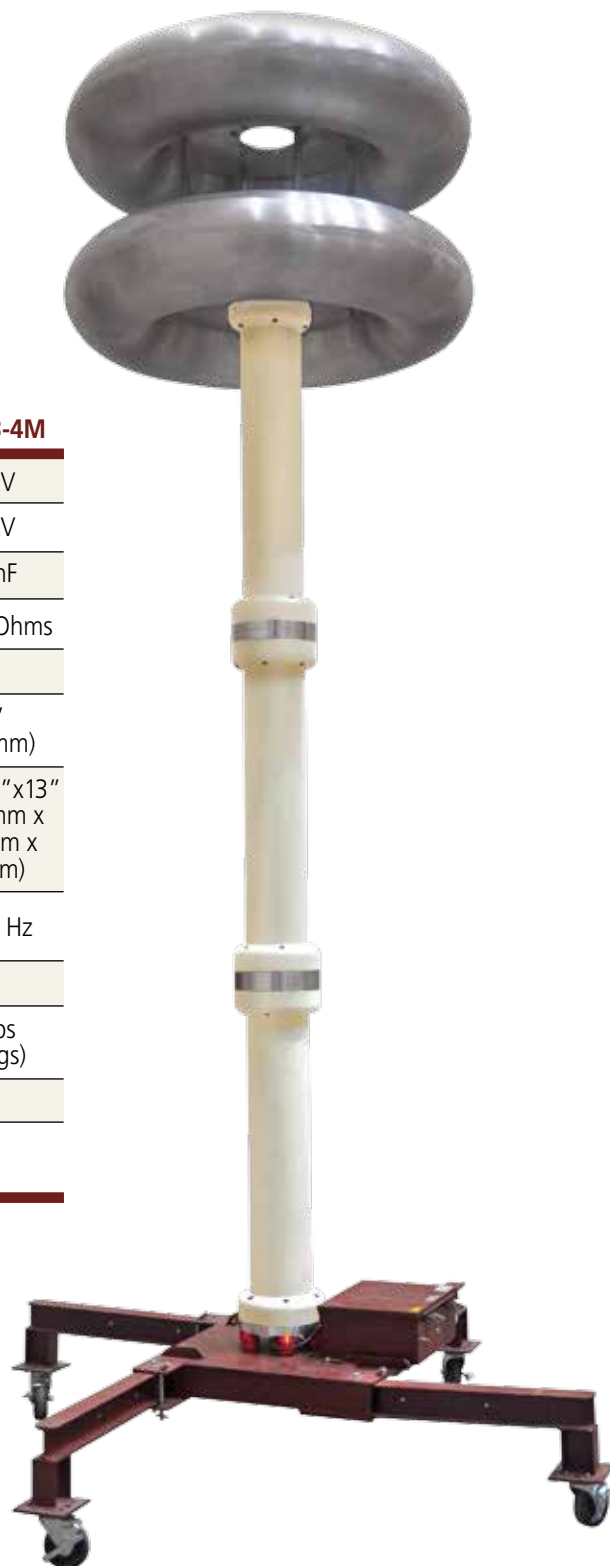

Design Features


- Units include a high voltage divider, metering section, and interconnect cables which are stored in a compact, durable case
- Line power indicator lamp
- Low battery indicator lamp
- 4 ½ digit LCD display
- Low and High range voltage selector
- Ni-MH (Nickel-Metal Hydride) battery pack

Environmental Operating Conditions

- 0-40°C, indoor/outdoor in fair weather
- Humidity <95% non-condensing
- Altitude <3300 ft (1000 meters)
- Storage 0-55°C, indoor dry conditions

Options

- DVD100, 100 kV AC/DC Divider 10,000:1 ratio
- DVD200, 200 kV AC/DC Divider 10,000:1 ratio
- DVD300, 300 kV AC/DC Divider 10,000:1 ratio
- KVM Metering Head, requires 10,000:1 ratio Divider
- 19" Rack Mount version of Metering Head

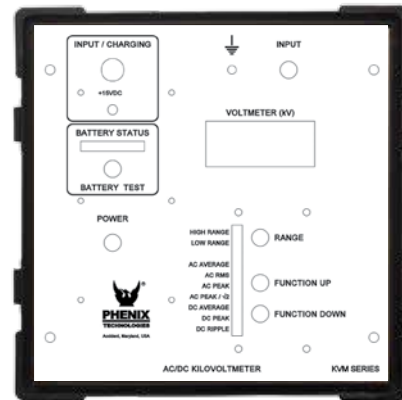

**Metering Head for
Models KVM100 and KVM200**



Metering Head for Model KVM300



19" Rack Mount Metering Head



**PHENIX
TECHNOLOGIES**

WORLD HEADQUARTERS

Phenix Technologies, Inc.
75 Speicher Drive
Accident, MD 21520 USA
Ph: +1.301.746.8118
Fx: +1.301.895.5570
Info@phenixtech.com

BRANCH OFFICES

Phenix Systems AG
Riehenstrasse 62A, 4058 Basel, Switzerland
Ph: +41.61.383.2770, Fx: +41.61.383.2771, Info@phenixsystems.com

Phenix Asia
Zhong Cheng Rd, Sec 1, No 177, 2F, Taipei 11148 Taiwan
Ph: +886.2.2835.9738, Fx: +886.2.2835.9879, Info@phenixasia.com

ISO
9001:2008
Compliant

